


Spec Sheet: 4 Outlet Bubblers

To order call (888) 90-TEMPO, or visit www.tempoinc.com

4 OUTLET COMPENSATING BUBBLERS

For more info visit our website www.tempoinc.com

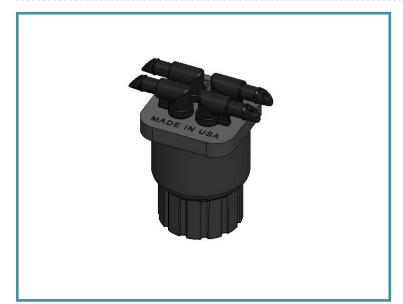

Features:

- Available in 4 flow rates and also as just a manifold.
- Color coded for easy flow rate identification.
- Silicon diaphragm on pressure compensating models
- Built-in filter slots to minimize clogging.
- Top-mounted durable rotating 1/4" barbed elbows to connect to 1/4" tubing (fits 0.160" to 0.170" ID tubing).
- 1/2" FIPT inlet.
- Screws directly on to 1/2" MIPT riser or nipple.
- Manufactured from engineering grade resin.
- Made in USA.

Part No.	Description	Color Code	Inlet	Outlets	Max Pressure
EPCB2	2 gph/outlet, 4 Outlet PC Bubbler	Blue	1/2" FIPT	1/4" barbed	60 psi
EPCB6	6 gph/outlet, 4 Outlet PC Bubbler	Black	1/2" FIPT	1/4" barbed	
EPCB10	10 gph/outlet, 4 Outlet PC Bubbler	Red	1/2" FIPT	1/4" barbed	
EPCB20	20 gph/outlet, 4 Outlet PC Bubbler	Green	1/2" FIPT	1/4" barbed	
FM4	4 Outlet Manifold	Grey	1/2" FIPT	1/4" barbed	

DISCHARGE RATES (GPH)

Part No.	20 psi	30 psi	45 psi	60 psi
EPCB2	1.8 gph	2.0 gph	2.4 gph	2.6 gph
EPCB6	5.2 gph	6.2 gph	7.8 gph	8.5 gph
EPCB10	8.0 gph	9.3 gph	11.6 gph	13.0 gph
EPCB20	14.0 gph	18.0 gph	21.0 gph	23.0 gph